

## **REPLACEMENT PARTS**

---

Miscellaneous Replacement Parts .....	237-241
Tractor Linkage Parts .....	242-253
Belts .....	254-261
Belt Sheaves .....	262-265
Pioneer Tips and Adapters .....	266-267
Irrigation Shafts and Parts .....	268
Solid Shaft Collars .....	269-270
Jaw Couplings .....	271

2020



**CATFISH POND AERATOR PARTS**

**Bearing Kits**

PART #	APPLICATIONS
422BK	Final drive-bull gear for drive line IH422, complete bearing kit
622BK	Final drive-bull gear for drive line IH622, complete bearing kit
422TS	Top side bearing kit for final drive-bull gear for IH422
622TS	Top side bearing kit for final drive-bull gear for IH622
622BS	Bottom side bearing kit for final drive-bull gear for IH422 and IH622

**UHMW Plastic Pillow Blocks**


PART #	APPLICATIONS
RAK 1-1/2" PL	1-1/2" pillow block
RAK 2" PL	2" pillow block

**Cast Iron Pillow Blocks**

PART #	APPLICATIONS
RAK 1-1/2"	Pillow block, 1-1/2" bore, Agri brand, import
RAK 1-1/2" USA	Pillow block, 1-1/2" bore, Timken®

MISCELLANEOUS  
REPLACEMENT PARTS

**Drivelines with Shielding for Aerators**

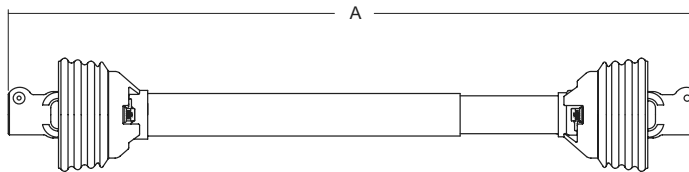

PART #	SERIES	LENGTH	TRACTOR YOKE	IMPLEMENT YOKE
14006424	4	48"	1-3/8" x 6 spl QD	1-1/2"
14006524	5	48"	1-3/8" x 6 spl QD	1-1/2"
14006624	6	48"	1-3/8" x 6 spl QD	1-1/2"
14016524	5	48"	1-3/8" x 21 spl QD	1-1/2"
14016624	6	48"	1-3/8" x 21 spl QD	1-1/2"

**ALLOWAY FLAIL CHOPPER PARTS**



**Side Knife**



**U-Bar Clevis**



**D-Ring**



**4-Bolt Flange**

PART #	ALLOWAY PART #	DESCRIPTION
Agri #50530001	505-3-0001	Side knife
Agri #50530014	505-3-0014	U-bar clevis
Agri #50530008	505-3-0008	D-ring
Alloway 1-15/16"	505-2-0492	4-bolt flange bearing with triple lip seals
G1115KRRB3		Triple lip bearing for above flange bearing


**CORN HEAD PARTS**

**Corn Head Gathering Chain and Sprockets**



PART #	J.D. & CASE IH NH PART #	DESCRIPTION
Agri #A85252	A85252	8 tooth hex bore sprocket
Agri #AH101219	AH101219	Idle sprocket 8 tooth greaseable
Agri #AN102448	AN102448	Idle sprocket 8 tooth non-greaseable
Agri #CHC-100	JD AN102009 Case IH #IH176279 NH #610831	Gathering chain endless

**Corn Head Combine Drivelines: Metric**



PART #	COMBINE YOKE	HEADER YOKE	OAL	DESCRIPTION	SERIES
14007635	1-3/8" x 21 spl	1-1/8" hex clamp	35"	John Deere® headers using two (2) drivelines per header	2400
14007631	1-3/8" x 21 spl	1-1/8" hex clamp	31"	John Deere® headers using one (1) drivelines per header	2400
14007633	1-1-8" x Hex SSL	1-1/8" hex clamp	33"	Case IH® combine using John Deere® header	2400

MISCELLANEOUS REPLACEMENT PARTS

**SERVIS RHINO FLAIL SHREDDER REPLACEMENT PARTS**

**Cutting Reel Assembly Drive Bearing**



PART #	DESCRIPTION
FYR-2"	Cutting reel assembly drive bearing. 4-bolt flange with 5/8" bolts. Fits models RC-15, RC-18, and RC-20. Replaces Rhino #00726300. SKF Brand.

**Cutting Reel Assembly Drive Bearing: Insert Bearing Only for Center Mount Assembly**



PART #	DESCRIPTION
22213E	Cutting reel assembly drive bearing, insert bearing only for center mount assembly. Fits models RC-25, RC-100 series, 115, 118, 120, and 125. Replaces Rhino #00726708. SKF Brand.

**Rhino RC100 Hub**



PART #	DESCRIPTION
RC100 Hub	Hub and spindle assembly for 120-125. Replaces Rhino #1450115A.

**Seal For Center Mount Assembly for Above Bearing Part #22213E**



PART #	DESCRIPTION
80X120X10	Seal used in center mount assembly bearing listed above, part #22213E. Replaces Rhino #00726709. Timken® brand.

MISCELLANEOUS REPLACEMENT PARTS

**Belt Drive: Banded Belt**



PART #	DESCRIPTION
5/5V750	Belt drive, banded belt. Fits models RC-15, RC-18, RC-20, RC-25, RC-100 series, 115, 118, 120, and 125. Replaces Rhino #00724090. Gates® brand only.

**Drive Tube Assembly Flange Bearing**



PART #	DESCRIPTION
RCJT1-1/2 USA	Drive tube assembly flange bearing. Fits models RC-15, RC-18, RC-20, RC-25, RC-100 series, 115, 118, 120, and 125. Replaces Rhino #00724713. Timken® brand. USA only.

**SERVIS RHINO FLAIL SHREDDER REPLACEMENT PARTS**

**Wheel Hub Bearing Kit for 5-Bolt Wheel Hub**



PART #	DESCRIPTION
Rhino #1 Kit	Wheel hub bearing kit for 5-bolt wheel hubs. Fits all models RC-15, RC-18, RC-20, RC-25, RC-100 series, 115, 118, 120, and 125.

**Wheel Hub Bearing Kit for 6-Bolt Wheel Spindle Assembly**

PART #	DESCRIPTION
Rhino #2 Kit	Wheel hub bearing kit for 6-bolt wheel spindle assembly. Fits models RC-100 series, 115, 118, 120, and 125.

**Wheel Spindle Assembly**

PART #	DESCRIPTION
Rhino RC100 Hub	6-bolt wheel hub assembly with spindle. For RC100 series. Replaces #1450115A and #0535506.

**Cutting Wheel Assembly: Shredder Knife, Short**



PART #	DESCRIPTION
724714AG	Cutting wheel assembly - shredder knife, short. Fits models RC-15, RC-18, RC-20, RC-25, RC-100 series, 110, 118, 120, and 125. Replaces Rhino #00724214.
724714HF AG	Same as above <b>with hard facing</b> .

**Bushing for Above Shredder Knife**

PART #	DESCRIPTION
724710AG	Bushing for above shredder knife. Replaces Rhino #00724210.

**Bolt for Above Shredder Knife**

PART #	DESCRIPTION
720512AG	Bolt for above shredder knife. Replaces Rhino #00720512.

**Nut for Above Shredder Knife**

PART #	DESCRIPTION
720710AG	Nut for above shredder knife. Replaces Rhino #00725916.

MISCELLANEOUS REPLACEMENT PARTS

**UNVERFERTH RIPPER STRIPPER**

**Complete Hub for Ripper Stripper**



PART #	DESCRIPTION
64533AG	Complete hub for ripper stripper. Includes bearings, o-rings, triple lip seal, and end cap. Replaces #64533.

**Hub Only for Above**

PART #	DESCRIPTION
83601AG	Hub only for above.

**Bearing Kit Only for #64533AG**

PART #	DESCRIPTION
UNV #1	Bearing kit only for #64533AG. Contains two (2) races, one (1) sealed bearing, one (1) open bearing, and one (1) o-ring.

**Combo Coultter Sealed Bearing Kit**



PART #	DESCRIPTION
UNV #2	Combo coultter sealed bearing kit. Replaces part #88420. Contains one (1) sealed bearing and one (1) o-ring.

**Seal Kit**

PART #	DESCRIPTION
UNV #3	Seal kit. Replaces #83958. Seal #C43LM67010 and o-ring.

**Combo Coultter Seal Kit**



PART #	DESCRIPTION
UNV #4	Combo coultter seal kit. Replaces kit #66683. Contains sealed bearing, two (2) o-rings, and triple lip seal.


**Rolling Harrow Basket Bearing Assembly**

PART #	DESCRIPTION
86263AG	Triple lipped prelubed bearing assembly with collar. Fits both single and double baskets.

MISCELLANEOUS REPLACEMENT PARTS

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**

**Forged Top Link**

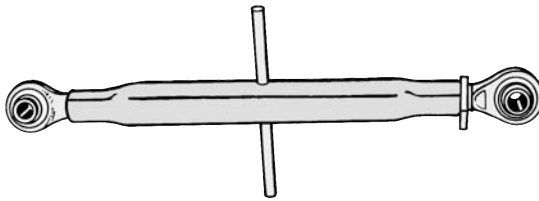

Quality forged top links available in Category 1 & 2, 2, and 3 sizes. All top links are yellow zinc dichromate plated unless otherwise specified.

PART #	CAT.	PIN HOLE SIZE	THREADS	BODY LENGTH	CLOSED LENGTH	OPEN LENGTH	REPAIR END PART #	
							LEFT	RIGHT
TL165	1	3/4"	1-1/8" NC	16"	21"	28"	RE1619	RE1620
TL166	1	3/4"	1-1/8" NC	20"	25"	35"	RE1619	RE1620
TL1670	1 & 2	3/4" & 1"	1-1/4" NC	16"	21"	32"	RE1619 or RE1641	RE1620 or RE1640
TL174	2	1"	1-1/8" NC	16"	21"	31"	RE1641	RE1640
TL176	2	1"	1-1/8" NC	20"	25"	37"	RE1641	RE1649
TL187	3	1"	1-3/8" NC	19-1/2"	25-1/2"	37"	RE1827	RE1826

**Top Link Repair Ends**



Forged and welded screw-in repair ends for Category 1 and 2 SpeeCo and other top links.

TRACTOR LINKAGE PARTS

PART #	CAT.	TYPE	PIN HOLE SIZE	THREAD DIAMETER	THREAD LENGTH	OVERALL LENGTH	FITS SPEECO TOP LINK
RE1619	1	Forged	3/4"	1-1/8" NC (LH)	6"	10"	TL165, TL166, TL167, TL1630, TL1670
RE1620	1	Forged	3/4"	1-1/8" NC (RH)	6"	10"	TL165, TL166, TL167, TL1630, TL1670
RE1717	2	Forged	1"	1-1/4" NC (LH)	5-1/2"	10"	TL173, TL175, TL1730, TL1735, TL1740
RE1718	2	Forged	1"	1-1/4" NC (RH)	5-1/2"	10"	TL173, TL175, TL1730, TL1735, TL1740

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**


**Drawbars**



One piece 3-point hitch cross drawbars to fit Category 1 through 3 tractors.

PART #	CAT.	NO. OF HOLES	LIFT ARM SPACING	HOLE DIAMETER	PIN DIAMETER	THICKNESS	WIDTH
DB411	1	11	26"	3/4"	7/8"	1"	2-1/2"
DB421	2	11	26"	3/4"	1-1/8"	1-1/4"	3"
DB422	2	13	32"	3/4"	1-1/8"	1-1/4"	3"
DB431	3	5	38"	1-1/4"	1-7/16"	1 3/4"	3-1/2"

**Lift Arms & Lift Arm Parts**

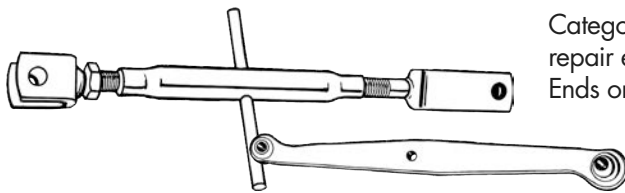


Category 1 lift arms and Category 1 and 2 lift arm repair ends. See also the Forged and Weld-On Ball Ends on page 317.

PART #	DESCRIPTION
LA335	Category 1 right or left hand forged lift arm. Fits all Ferguson models. Ford 2N, 8N, and NAA. Massey-Ferguson 35 and 50. Oliver 3-point conversion. John Deere® 1010. 7/8" pin holes; 31-3/4" ball centers; 34-1/2" overall length.
LA3324	Category 1 forged bent lift arm repair end. 7/8" pin hole. 5-1/2" overall length.
LA3325	Category 2 forged right or left straight lift arm repair end. 1-1/8" pin hole. 5" overall length.
SL152	Category 1 lift arm leveling assembly. 18 1/2" closed. 25" open length. 7/8" NF thread diameter. Replaces Ford #NCA577A. Left hand repair end #RE158. Right hand repair end #RE159.

**TRACTOR LINKAGE PARTS**

**Stabilizer Kits**



Designed to increase the stability of the tractor lift arms. Stabilizer kits reduce side sway of the three-point hitch when adjusted. For Category 1 implements and a variety of tractors.


PART #	DESCRIPTION
SK611	For Category 1 implements with 7/8" draw pins. Replaces Ferguson 677022. Fits all Ferguson models Ford 2N, 8N, 9N, NAA, 600, and 800. Massey-Ferguson 35 and 60. Kit contains two (2) #SA621 arms, two (2) #SB631 brackets, two (2) #P781, and two (2) #P791 lynch pins.
SK612	For Category 1 implements with 7/8" draw pins. Replaces Ferguson 677289 and 677290. Fits Massey-Ferguson models 35, 50, 135, 150, 1962 and later models with low clearance. Kit contains two (2) #SB631 brackets, two (2) #P781, and two (2) #P791 lynch pins. Painted blue.



**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**

**Stabilizer Arms & Brackets**

Replacement stabilizer arms for SpeeCo stabilizer kits and a variety of tractors. Stabilizer arms increase the stability of the tractor lift arms. Stay straps for Category 1 tractors are used to maintain an implement at a set height.

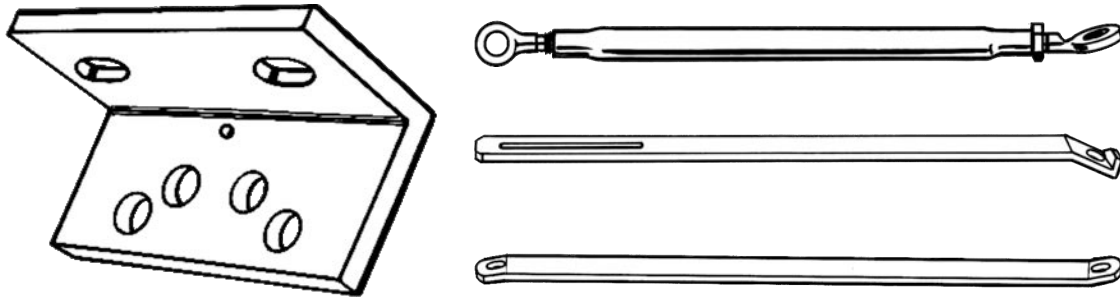


PART #	DESCRIPTION
SA621	<p><b>Right or Left Universal Stabilizer Arm.</b>                      7/8" pin holes on 31-9/16" centers.                      SpeeCo #SK611 stabilizer kit.</p>
SA622	<p><b>Right or Left Universal Stabilizer Arm.</b>                      7/8" pin holes on 33-1/8" centers.                      Replaces Massey-Ferguson #ST96362358.</p>
SA6260	<p><b>Heavy Duty Adjustable Forged Stabilizer Arm.</b>                      Adjustable from 28-1/2" to 36". 7/8" pin holes. 7/8" NF threads.                      Fits all Ferguson models. Ford 2N, 8N, 9N, NAA, and 600.                      Massey-Ferguson 35, 50, 175, 65, 135, 150, and 180.                      Available in yellow zinc dichromate plating.</p>
SA6251	<p><b>Left Stabilizer Arm.</b>                      7/8" pin holes on 31-5/8" centers.                      Fits Ford 2000 and 3000.                      Fits SpeeCo #SK61110 stabilizer kit.</p>
SA6252	<p><b>Right Stabilizer Arm.</b>                      Fits Ford 2000 and 3000. 7/8" pin holes on 31-5/8" centers.                      Fits SpeeCo #SK61110 stabilizer kit.</p>
SB631	<p><b>Right or Left Universal Stabilizer Bracket.</b>                      Fits SpeeCo #SK611, #SK612, and #SK6110.                      Ferguson and Ford stabilizer kits.                      Accommodates #P781 stabilizer stub pin.</p>

TRACTOR LINKAGE PARTS

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**


**Top Link Ball Sockets**



Weld-on top link ball sockets for Category 1 and 2 sizes. Available in standard duty yellow zinc dichromated plated versions.

PART #	CAT.	PIN HOLE SIZE	LENGTH THROUGH BORE	SLEEVE WIDTH	SLEEVE O.D.
B213	1"	3/4"	1-5/8"	3/4"	2"
B214	2"	1"	1-3/4"	7/8"	2-3/8"


**Lift Arm Ball Sockets**

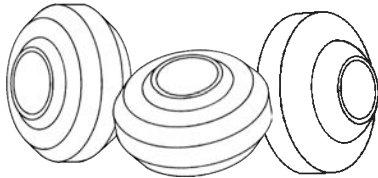

Weld-on lift arm ball sockets to fit Category 1 through 3 tractors. Available in standard duty yellow zinc dichromate plated versions.

PART #	SLEEVE O.D.	CAT.	PIN HOLE SIZE	LENGTH THROUGH BORE	SLEEVE WIDTH
B223	7/8"	1"	7/8"	1-3/8"	7/8"
B224	15/16"	2"	1-1/8"	1-5/16"	15/16"
B2232	1-11/32"	3"	1-7/16"	1-3/4"	1-11/32"

**Forged Weld-On Ball Ends**

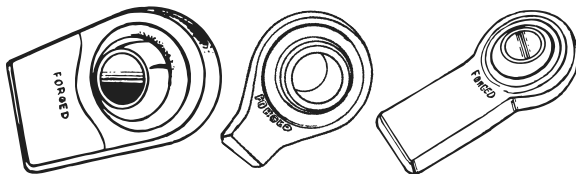


High-Quality weld-on top link and lift arm ball sockets in Category 1 and 2 sizes. Lift arm ends are available in straight and bent styles.

**TRACTOR LINKAGE PARTS**

PART #	CAT.	DESCRIPTION
RE1642	1	Top link end
RE1643	2	Top link end
LA3322	1	Lift arm end, straight
LA3323	1	Lift arm end, bent
LA3324	2	Lift arm end, bent
LA3325	2	Lift arm end, straight

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**

**Replacement Balls**



Top link and lift arm balls for Ford, John Deere®, Oliver, and other tractors. Designed to replace original balls. Available in yellow zinc dichromate plating.

PART #	CAT.	DESCRIPTION	PIN HOLE SIZE	LENGTH THROUGH BORE	BALL DIAMETER
B242	2	John Deere® and Oliver top link ball. Replaces John Deere® #F2681, Oliver #104585A.	1"	1-3/4"	2"
B243	1	Ford lift arm ball. Replaces Ford #DDN995233. Fits Ford 3000, 4000, and 5000.	7/8"	1-3/8"	2-1/4"
B244	2	Ford lift arm ball. Replaces Ford #C5NN557A. Fits Ford 3000, 4000, & 5000.	1-1/8"	1-3/4"	2-1/4"

**Top Link Reducer Bushings**



Used in the pin hole of a top link to allow a smaller category pin to fit. Available in yellow zinc dichromate plating.

PART #	CAT.	DESCRIPTION	OUTSIDE DIA.	INSIDE DIA.	LENGTH
B829	0-1	Fits all Category 0 top link pins.	3/4"	5/8"	1-5/8"
B831	1-2	Fits all Category 1 top link pins. Replaces Ford #C7NN6993A.	1"	3/4"	1-15/16"
B8220	1-2	Fits all Category 1 top link pins; short.	1"	3/4"	1-5/8"
B833	2-3	Fits all category 2 top link pins.	1-1/4"	1"	1-15/16"

TRACTOR LINKAGE PARTS

**Lift Arm Reducer Bushings**




Used in the pin hole of a lift arm to allow a smaller category of pin to fit. Available in yellow zinc dichromate plating.

PART #	CAT.	DESCRIPTION	OUTSIDE DIA.	INSIDE DIA.	LENGTH
B828	0-1	Fits all Category 0 lift arms.	7/8"	5/8"	1-3/8"
B821	1-2	Fits all Category 1 lift arm pins. Replaces Ford #C7NN6992A.	1-1/8"	7/8"	1-3/4"
B8221	1-2	Fits all Category 1 lift arm pins. Replaces John Deere® #F2684.	1-1/8"	7/8"	1-3/8"
B832	2-3	Fits all Category 2 lift arm pins.	1-7/16"	1-1/8"	1-3/4"
B8320	2-3	Fits all Category 2 lift arm pins; extra long.	1-7/16"	1-1/8"	3-1/4"
B8312	2-3	Fits all Category 2 lift arm pins. 15/32" lynch pin hole.	1-7/16"	1-1/8"	2-1/2"

## TRACTOR LINKAGE PARTS & FARM ACCESSORIES


### Stabilizer Pins

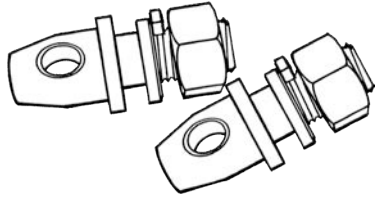

Stabilizer stub pins for SpeeCo, Ford, Ferguson, and other stabilizer kits. Available in yellow zinc dichromate plating.

PART #	DESCRIPTION	PIN DIAMETER	USABLE LENGTH	OVERALL LENGTH	THREAD DIAMETER
P781	Replaces Ford 2#30044. Massey-Ferguson #18177M1.	7/8"	3/8"	2-5/8"	5/8" NF
P785	Replaces Ford #141185. Massey-Ferguson #MF668154M1.	7/8"	1-1/4"	3-1/8"	5/8" NF

### Draw Pins (Lift Arm Pins)

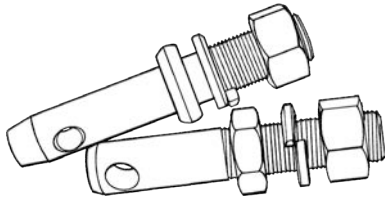


Forged and adjustable Category 0 through 3 draw pins for a variety of applications. All pins are yellow zinc dichromate plated.

PART #	CAT.	DESCRIPTION	PIN DIA.	USABLE LENGTH	OVERALL LENGTH	THREAD DIAMETER	THREAD LENGTH
P7221	0-1	To work Category 0 implements on Category 1 tractor. Adjustable.	7/8"	1-3/4"	4-1/2"	5/8" NF	2"
P722	1	Adjustable. Universal.	7/8"	Adjustable	5"	7/8" NF	2-5/8"
P728	1	Forged. Universal.	7/8"	1-3/4"	5-1/2"	7/8" NF	1-5/8"
P7219	1	Adjustable. Universal. Extra long.	7/8"	Adjustable	6-1/4"	7/8" NF	3-1/2"
P7245	1	Forged. Extra long.	7/8"	2-1/4"	6-1/2"	7/8" NF	2-1/4"
P724	1-2	To work Category 1 implements on Category 2 tractor. Adjustable.	1-1/8"	Adjustable	5-1/4"	7/8" NF	2-7/16"
P7240	1-2	To work Category 1 implements on Category 2 tractor. Forged.	1-1/8"	1-13/16"	5-1/14"	7/8" NF	1-5/8"
P7249	1 & 2	Forged. Universal.	7/8" & 1-1/8"	2-1/16"	8"	1" NF	1-1/4"
P721	2	Adjustable. Universal.	1-1/8"	Adjustable	6-1/8"	1-1/8" NF	3-3/8"
P7212	2	Forged. Universal.	1-1/8"	1-3/4"	6-1/8"	1-1/8" NF	2-3/8"
P7243	2-3	To work Category 2 implements on Category 3 tractor. Forged.	1-7/16"	1-7/8"	5-3/4"	1-1/8" NF	1-1/2"
P7229	2	Forged. Universal.	1-7/16"	2"	5-7/8"	1-3/8" NF	1-1/2"

TRACTOR LINKAGE PARTS

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**


**Clevis Type Draw Pins**

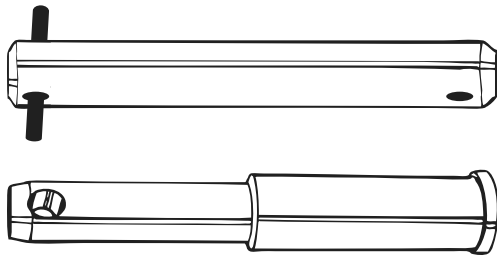

For use with implements with yoke type mountings. All pins are yellow zinc dichromate plated.

PART #	CAT.	TYPE	PIN DIAMETER	USABLE LENGTH	OVERALL LENGTH
P7234	1	Roll pin	7/8"	4-1/2"	6"
P7236	2	Roll pin	1-1/8"	4-3/4"	6-1/2"
P7237	2	Roll pin	1-1/8"	5-3/8"	7"
P7238	2	Roll pin	1-1/8"	7-3/8"	9"
P7250	2 and 3	Head	1-1/8" and 1-7/16"	3-5/8 and 4-1/4"	9-1/4"

**Top Link Pins**

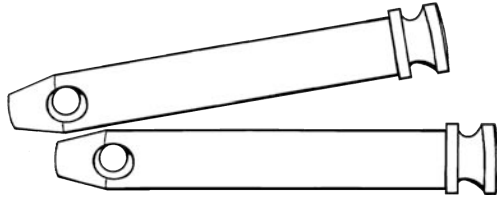


Sizes and styles for Category 0 through 3 tractors. Available in yellow zinc dichromate plated.

**TRACTOR LINKAGE PARTS**

PART #	CAT.	DESCRIPTION	PIN DIA.	USABLE LENGTH	OVERALL LENGTH
P776	0	Top link pin	5/8"	3"	4-7/16"
P771	1	Replaces Ford #9N-560, Ferguson #195647M1.	3/4"	2-3/4"	4-1/2"
P772	1	Long top link pin. Replaces Ferguson #195589M1, #AC339942.	3/4"	3-7/8"	5-1/2"
P7715	1	Extra long top link pin. Replaces Ford #E381T9.	3/4"	4-3/4"	6-3/8"
P7716	2	Replaces Ford #C5NN560A, #MF185873M91, #AC2090149/239888.	1"	3-9/16"	5-1/4"
P774	2	Replaces Ford #C5NN486A	1"	4-3/8"	6"
P7711	3	Top link pin	1-1/4"	4-5/8"	6-1/2"

## TRACTOR LINKAGE PARTS & FARM ACCESSORIES


### Swivel Handle Forged Hitch Pins

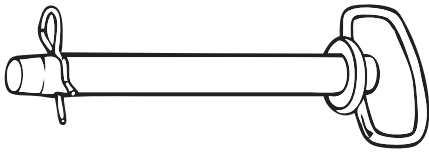

Forged head hitch pin with swivel handle and clip pin. More than 25% stronger than Grade 2. Available in yellow zinc dichromate.

PART #	PIN DIAMETER	USABLE LENGTH	OVERALL LENGTH	CLIP PIN PART #
P71010C	3/8"	4-1/4"	4-3/4"	P7923
P71011C	1/2"	4-1/4"	5-3/4"	P7924
P71012C	1/2"	6-1/4"	7-3/4"	P7924
P71021C	5/8"	4-1/4"	5-3/4"	P7924
P71022C	5/8"	6-1/4"	7-3/4"	P7924
P71031C	3/4"	4-1/4"	5-3/4"	P7924
P71032C	3/4"	6-1/4"	7-3/4"	P7924
P71041C	7/8"	4-1/4"	5-3/4"	P7925
P71042C	7/8"	6-1/4"	7-3/4"	P7925
P71051C	1"	4-1/4"	5-3/4"	P7927
P71052C	1"	6-1/4"	7-3/4"	P7927
P71062C	1-1/8"	6-1/4"	7-3/4"	P7928
P71072C	1-1/4"	6-1/4"	7-3/4"	P7928

### Grade 5 Forged Red Head Hitch Pins



Forged head hitch pin with swivel handle and clip pin. More than 25% stronger than Grade 2.


TRACTOR LINKAGE  
PARTS

PART #	PIN DIAMETER	USABLE LENGTH	OVERALL LENGTH	CLIP PIN PART #
P700511	1/2"	3-5/8"	6-5/8"	P7923
P700521	5/8"	4"	7"	P7924
P700522	5/8"	5-3/4"	9"	P7924
P700531	3/4"	4"	7"	P7925
P700532	3/4"	6-1/2"	9-1/2"	P7925
P700541	7/8"	4-1/4"	7-1/4"	P7925
P700542	7/8"	6-1/2"	9-1/2"	P7925
P700551	1"	4-3/4"	7-3/4"	P7927
P700552	1"	7-1/2"	10"	P7927
P700562	1-1/8"	8-1/2"	11-1/2"	P7927
P700572	1-1/4"	8-1/2"	11-1/2"	P7928
P700582	1-1/2"	8-1/2"	11-1/2"	P7928

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**


**Lockease Safety Hitch Pin**

Patented locked mechanism on top of pin operates with one hand and keeps pin securely in drawbar. Large handle provides more leverage for easy removal. Heavy duty hinged handle and lock helps prevent damage and injury from disengaged pins. Large collar prevents pin damage.

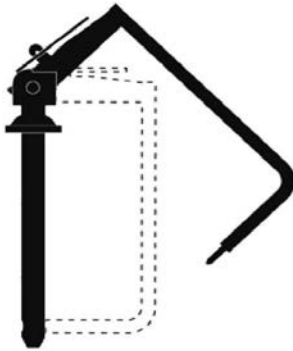

PART #	SHAFT DIAMETER	USABLE LENGTH
LH80140	5/8"	4-1/2"
LH80150	3/4"	4-1/2"
LH80160	3/4"	6"
LH80165	7/8"	4-1/2"
LH80170	7/8"	6"
LH80180	1"	6"
LH80190	1-1/8"	7"
LH80200	1-1/4"	7"

**Bent Hitch Pins**




Many farm, lawn and garden and industrial applications. Complete with "R" clip pin. Available in yellow zinc dichromate plating.

PART #	DIAMETER	USABLE LENGTH	CLIP PIN PART #
P71120	1/2"	2-1/2"	P7924
P71111	1/2"	3"	P7924
P71126	5/8"	4"	P7924
P71113	3/4"	3-1/2"	P7924
P71130	3/4"	5"	P7924

TRACTOR LINKAGE PARTS

**Hitch Pin Clips**




Available in the most popular sizes for farm and other applications. Available in yellow zinc dichromate plating.

PART #	WIRE DIAMETER	OVERALL LENGTH	FITS PIN DIAMETER
P7922	1/16"	1-9/16"	3/8" to 1/2"
P7923	3/32"	1-5/8"	1/4" to 1/2"
P7924	1/8"	1-15/16"	1/2" to 3/4"
P7925	5/32"	2-15/16"	5/8" to 1"
P7927	3/16"	3-3/4"	7/8" to 1-1/4"
P7928	1/4"	4"	3/4" to 1"
P7929	5/16"	5-15/16"	1" to 1-7/16"
P7929S	5/16"	4-1/8"	1" to 1-7/16"
P793	5/16"	3-1/2"	Fits 5/16" Hole


## TRACTOR LINKAGE PARTS & FARM ACCESSORIES

### Implement Jacks and Parts



Replace hydraulic cylinders or old screw jacks in those applications where frequent adjustment is needed.

PART #	DESCRIPTION
SL1541	Heavy duty ratchet jack with 1-1/4" ACME threads and grease. Adjustable from 20" closed to 28" open; 1" clevis pins, clip pins, and handle included.
SL153	Turnbuckle implement jack with 1-1/4" NC threads. Adjustable from 20" to 28" open; 1" pin holes



### Lynch Pins

Forged fasteners for numerous farm and other applications. Yellow zinc dichromate plated except for the #P7913 and #P7914 which have a black powder coated finish.

PART #	DESCRIPTION	PIN DIA.	USABLE LENGTH	SHANK LENGTH	OVERALL LENGTH
P7919	Standard	3/16"	1"	1-3/8"	1-5/8"
P7920	#P7919 with chain and cotter pin	3/16"	1"	1-3/8"	1-5/8"
P791	Standard	7/16"	1-1/4"	1-3/4"	2"
P792	#P791 with chain and cotter pin	7/16"	1-1/4"	1-3/4"	2"
P794	Standard	1/4"	1-1/4"	1-3/4"	2-1/8"
P795	Short shank	7/16"	1-1/4"	1-3/8"	1-3/4"
P796	#P795 with chain and cotter pin	7/16"	1-1/4"	1-3/8"	1-3/4"
P7913	Heavy duty. Fits cat. 1, 2 and 3 pins.	7/16"	1-1/2"	1-3/4"	2-1/8"
P7914	#P7913 with chain and cotter pin	7/16"	1-1/2"	1-3/4"	2-1/8"
P7915	Standard	5/16"	1-1/4"	1-3/4"	2-1/8"
P7916	Standard	3/8"	1-1/4"	1-3/4"	2-1/8"
P798	Long. Fits cat. 1, 2 and 3 pins.	7/16"	1-3/4"	2"	2-5/16"
P798E	Long Shank	7/16"	1-3/4"	2"	2-5/16"

TRACTOR LINKAGE  
PARTS




### Wirelock Pins

This one piece fastener eliminates cotter pin loss and fits most quick release applications. Round or square handle available in most sizes. C1010 material used with zinc plating finish.

PART #	DESCRIPTION	PIN DIAMETER	USABLE LENGTH	SHANK LENGTH	OVERALL LENGTH
P7939	Square	5/16"	2-1/4"	2-3/4"	3"
P7940	Round	5/16"	2-1/4"	2-3/4"	3"

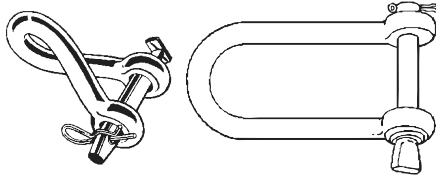

**TRACTOR LINKAGE PARTS & FARM ACCESSORIES**
**Twisted & General Purpose Clevises**


Totally forged which provides better grain structure without built-in stress and more consistency in strength, quality and conformity. Available in a black powder coated finish. Clevis pins are yellow dichromate plated.

PART #	BODY DIAMETER	CLEVIS OPENING	USABLE LENGTH	PIN DIAMETER	WORKING LOAD LIMIT (LBS.)
CL490203	5/8"	7/8"	3"	1/2"	6,000
CL490204	3/4"	1-5/16"	3-1/2"	5/8"	12,000
CL490205	7/8"	1-5/16"	3"	3/4"	16,000
CL490206	7/8"	1-5/16"	3-7/8"	3/4"	16,000
CL490207	15/16"	1-7/16"	4-1/4"	7/8"	20,000
CL490208	1"	2-1/8"	5"	1"	25,000

**General Purpose Clevis**

PART #	BODY DIAMETER	CLEVIS OPENING	USABLE LENGTH	PIN DIAMETER	WORKING LOAD LIMIT (LBS.)
CL490312	3/4"	2-1/2"	6-3/16"	3/4"	10,000

**Farm Clevises**


Screw pin shackle type used for multiple hitches and crawler tractors.

PART #	BODY DIAMETER	CLEVIS OPENING	USABLE LENGTH	PIN DIAMETER	WORKING LOAD LIMIT (LBS.)
CL490401	1/4"	15/32"	1-1/8"	5/16"	1,000
CL490402	5/16"	17/32"	1-1/4"	3/8"	2,000
CL490403	3/8"	23/32"	1-7/16"	7/16"	3,000
CL490404	7/16"	3/4"	1-11/16"	1/2"	4,000
CL490405	1/2"	13/16"	1-15/16"	5/8"	6,500
CL490406	5/8"	1-1/16"	2-1/2"	3/4"	9,000
CL490407	3/4"	1-1/4"	3"	7/8"	13,000
CL490408	7/8"	1-7/16"	3-1/4"	1"	15,000
CL490409	1"	1-11/16"	3-3/4"	1-1/8"	17,000
CL490410	1-1/8"	1-13/16"	4-1/4"	1-1/4"	24,000
CL490411	1-1/4"	2"	4-1/2"	1-3/8"	28,000

## TRACTOR LINKAGE PARTS & FARM ACCESSORIES


### Straight Clevises



Totally forged which provides better grain structure without built-in stress and more consistency in strength, quality and conformity.

PART #	BODY DIA.	CLEVIS OPENING	USABLE LENGTH	PIN DIA.	WORKING LOAD LIMIT (LBS.)
CL490103	5/8"	7/8"	3-1/4"	1/2"	6,000
CL490104	3/4"	1-5/16"	3-3/4"	5/8"	12,000
CL490105	7/8"	1-5/16"	3-1/4"	3/4"	16,000
CL490106	7/8"	1-5/16"	4-1/4"	3/4"	16,000
CL490107	15/16"	1-7/16"	4-5/8"	7/8"	20,000
CL490108	1"	2-1/8"	5-5/16"	1"	25,000

### Utility Clevises




Totally forged which provides better grain structure without built-in stress and more consistency in strength, quality and conformity. Available in a black powder coated finish. Clevis pins are yellow dichromate plated.

PART #	BODY DIA.	CLEVIS OPENING	USABLE LENGTH	PIN DIA.	WORKING LOAD LIMIT (LBS.)
CL490301	1/4"	15/32"	7/8"	5/16"	1,000
CL490302	5/16"	17/32"	1"	3/8"	1,500
CL490303	3/8"	21/32"	1-1/4"	7/16"	2,000
CL490304	7/16"	23/32"	1-1/2"	1/2"	3,000
CL490305	1/2"	13/16"	1-11/16"	5/8"	6,000
CL490306	5/8"	1-1/16"	2"	3/4"	9,000


TRACTOR LINKAGE  
PARTS

### Mid Links



PART #	CHAIN SIZE	WORKING LOAD LIMIT (LBS.)
CL490501	1/4" or 5/16"	4,700
CL490502	3/8"	6,600
CL490503	7/16" or 1/2"	11,300
CL490504	5/8"	18,000

### Tractor Drawbar Grab Hook



Totally forged which provides better grain structure without built-in stress and more consistency in strength, quality and conformity. Available in a black powder coated finish. Clevis pins are yellow dichromate plated.


PART #	DESCRIPTION	WORKING LOAD LIMIT (LBS.)
CL490516	For all tractor drawbars up to 1 5/8" thick. For use with 5/16" to 1/2" chain.	9,000

**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**



**A Series Belts**

Featuring a composite, multi-purpose construction, these belts resist oil and heat, ozone, sunlight, weather, and aging.



**Applications**

Suitable for all agricultural and industrial applications, including v-flat drives.

**Recommended Sheaves**

Multi-duty sheaves

**Features**

- **Gates Curves** provide proper cord support and full contact with the sheave-groove for uniform loading, uniform wear, and increased belt life.
- **Flex-Bonded Cords** are strongly bonded to the body of the belt resulting in equal load distribution and absorption of bending stress without cord deterioration.
- The **Flex-Weave® Cover** is a patented fabric construction for longer cover life, providing extended protection to the belt corn from oil, dirt, and heat.
- Meets RMA **oil and heat resistant** standards.
- Meets RMA **static conductivity** requirements

V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
A20	22.0	A30	32.0	A40	42.0
A21	23.0	A31	33.0	A41	43.0
A22	24.0	A32	34.0	A42	44.0
A23	25.0	A33	35.0	A43	45.0
A24	26.0	A34	36.0	A44	46.0
A25	27.0	A35	37.0	A45	47.0
A26	28.0	A36	38.0	A46	48.0
A27	29.0	A37	39.0	A47	49.0
A28	30.0	A38	40.0	A48	50.0
A29	31.0	A39	41.0	A49	51.0


**A Series belts continue on the next page.**

BELTS



**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**

**A Series Belts, Continued**




V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
A50	52.0	A80	82.0	A112	114.0
A51	53.0	A81	83.0	A113	115.0
A52	54.0	A82	84.0	A114	116.0
A53	55.0	A83	85.0	A115	117.0
A54	56.0	A84	86.0	A116	118.0
A55	57.0	A85	87.0	A117	119.0
A56	58.0	A86	88.0	A118	120.0
A57	59.0	A87	89.0	A120	122.0
A58	60.0	A88	90.0	A124	126.0
A59	61.0	A89	91.0	A125	127.0
A60	62.0	A90	92.0	A128	130.0
A61	63.0	A91	93.0	A130	132.0
A62	64.0	A92	94.0	A132	134.0
A63	65.0	A93	95.0	A133	135.0
A64	66.0	A94	96.0	A134	136.0
A65	67.0	A95	97.0	A136	138.0
A66	68.0	A96	98.0	A140	142.0
A67	69.0	A97	99.0	A144	146.0
A68	70.0	A98	100.0	A158	160.0
A69	71.0	A99	101.0	A173	175.0
A70	72.0	A100	102.0	A180	182.0
A71	73.0	A101	103.0		
A72	74.0	A102	104.0		
A73	75.0	A103	105.0		
A74	76.0	A104	106.0		
A75	77.0	A105	107.0		
A76	78.0	A106	108.0		
A77	79.0	A107	109.0		
A78	80.0	A108	110.0		
A79	81.0	A110	112.0		

**BELTS**

**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**




**B Series Belts**



V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
B24	27.0	B52	55.0	B80	83.0
B25	28.0	B53	56.0	B81	84.0
B26	29.0	B54	57.0	B82	85.0
B27	30.0	B55	58.0	B83	86.0
B28	31.0	B56	59.0	B84	87.0
B29	32.0	B57	60.0	B85	88.0
B30	33.0	B58	61.0	B86	89.0
B31	34.0	B59	62.0	B87	90.0
B32	35.0	B60	63.0	B88	91.0
B33	36.0	B61	64.0	B89	92.0
B34	37.0	B62	65.0	B90	93.0
B35	38.0	B63	66.0	B91	94.0
B36	39.0	B64	67.0	B92	95.0
B37	40.0	B65	68.0	B93	96.0
B38	41.0	B66	69.0	B94	97.0
B39	42.0	B67	70.0	B95	98.0
B40	43.0	B68	71.0	B96	99.0
B41	44.0	B69	72.0	B97	100.0
B42	45.0	B70	73.0	B98	101.0
B43	46.0	B71	74.0	B99	102.0
B44	47.0	B72	75.0	B100	103.0
B45	48.0	B73	76.0	B101	104.0
B46	49.0	B74	77.0	B102	105.0
B47	50.0	B75	78.0	B103	106.0
B48	51.0	B76	79.0	B104	107.0
B49	52.0	B77	80.0	B105	108.0
B50	53.0	B78	81.0	B106	109.0
B51	54.0	B79	82.0	B107	110.0

BELTS

***B Series belts continue on the next page.***


**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**
**B Series Belts, Continued**



V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
B108	111.0	B145	148.0	B200	203.0
B109	112.0	B146	149.0	B201	204.0
B110	113.0	B147	150.0	B204	207.0
B111	114.0	B148	151.0	B205	208.0
B112	115.0	B149	152.0	B206	209.0
B113	116.0	B150	153.0	B210	213.0
B114	117.0	B151	154.0	B212	215.0
B115	118.0	B152	155.0	B218	221.0
B116	119.0	B153	156.0	B220	223.0
B117	120.0	B154	157.0	B221	224.0
B118	121.0	B155	158.0	B223	226.0
B119	122.0	B156	159.0	B225	228.0
B120	123.0	B157	160.0	B228	231.0
B122	125.0	B158	161.0	B230	233.0
B123	126.0	B160	163.0	B234	237.0
B124	127.0	B162	165.0	B235	238.0
B125	128.0	B164	167.0	B236	239.0
B126	129.0	B165	168.0	B237	240.0
B127	130.0	B166	169.0	B240	243.0
B128	131.0	B167	170.0	B248	251.0
B130	133.0	B168	171.0	B253	257.0
B131	134.0	B170	173.0	B255	258.0
B132	135.0	B172	175.0	B265	268.0
B133	136.0	B173	176.0	B270	273.0
B134	137.0	B174	177.0	B276	279.0
B135	138.0	B175	178.0	B285	288.0
B136	139.0	B177	180.0	B290	293.0
B137	140.0	B178	181.0	B292	295.0
B138	141.0	B182	185.0	B300	303.0
B139	142.0	B184	187.0	B315	318.0
B140	143.0	B190	193.0	B330	333.0
B141	144.0	B191	194.0	B360	363.0
B142	145.0	B192	195.0		
B143	146.0	B195	198.0		
B144	147.0	B199	202.0		

**BELTS**

**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**



**C Series Belts**




V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
C46	50.0	C86	90.0	C130	134.0	C181	185.0
C47	51.0	C87	91.0	C131	135.0	C182	186.0
C48	52.0	C88	92.0	C132	136.0	C183	187.0
C49	53.0	C89	93.0	C133	137.0	C185	189.0
C50	54.0	C90	94.0	C134	138.0	C190	194.0
C51	55.0	C91	95.0	C135	139.0	C195	199.0
C52	56.0	C92	96.0	C136	140.0	C200	204.0
C53	57.0	C93	97.0	C137	141.0	C202	206.0
C54	58.0	C94	98.0	C138	142.0	C204	208.0
C55	59.0	C95	99.0	C139	143.0	C206	210.0
C56	60.0	C96	100.0	C140	144.0	C207	211.0
C57	61.0	C97	101.0	C142	146.0	C208	212.0
C58	62.0	C98	102.0	C143	147.0	C210	214.0
C59	63.0	C99	103.0	C144	148.0	C218	220.0
C60	64.0	C100	104.0	C145	149.0	C220	222.0
C61	65.0	C101	105.0	C146	150.0	C225	227.0
C62	66.0	C102	106.0	C147	151.0	C240	242.0
C63	67.0	C103	107.0	C148	152.0	C245	247.0
C64	68.0	C104	108.0	C149	153.0	C248	250.0
C65	69.0	C105	109.0	C150	154.0	C250	252.0
C66	70.0	C106	110.0	C151	155.0	C255	257.0
C67	71.0	C107	111.0	C152	156.0	C265	267.0
C68	72.0	C108	112.0	C153	157.0	C270	272.0
C69	73.0	C109	113.0	C154	158.0	C275	277.0
C70	74.0	C110	114.0	C155	159.0	C280	282.0
C71	75.0	C111	115.0	C156	160.0	C285	287.0
C72	76.0	C112	116.0	C157	161.0	C290	292.0
C73	77.0	C113	117.0	C158	162.0	C295	297.0
C74	78.0	C114	118.0	C160	163.0	C300	302.0
C75	79.0	C115	119.0	C162	164.0	C315	317.0
C76	80.0	C116	120.0	C165	169.0	C360	362.0
C77	81.0	C117	121.0	C166	170.0	C390	392.0
C78	82.0	C118	122.0	C167	171.0	C420	422.0
C79	83.0	C119	123.0	C168	172.0		
C80	84.0	C120	124.0	C169	173.0		
C81	85.0	C121	125.0	C170	174.0		
C82	86.0	C122	126.0	C173	177.0		
C83	87.0	C123	127.0	C177	181.0		
C84	88.0	C124	128.0	C178	182.0		
C85	89.0	C125	129.0	C180	186.0		

BELTS



**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**

**3VX Series Belts : Super HC Molded Notch Belts**




V-BELT #	OUTSIDE LENGTH (IN)
3VX250	25.0
3VX265	26.5
3VX280	28.0
3VX300	30.0
3VX315	31.5
3VX335	33.5
3VX355	35.5
3VX375	37.5
3VX400	40.0
3VX425	42.5
3VX450	45.0

V-BELT #	OUTSIDE LENGTH (IN)
3VX475	47.5
3VX500	50.0
3VX530	53.0
3VX550	55.0
3VX560	56.0
3VX600	60.0
3VX630	63.0
3VX650	65.0
3VX670	67.0
3VX710	71.0
3VX750	75.0

V-BELT #	OUTSIDE LENGTH (IN)
3VX800	80.0
3VX850	85.0
3VX900	90.0
3VX950	95.0
3VX1000	100.0
3VX1060	106.0
3VX1120	112.0
3VX1180	118.0
3VX1250	125.0
3VX1320	132.0
3VX1400	140.0



**5VX Series Belts**



V-BELT #	OUTSIDE LENGTH (IN)
5VX450	45.0
5VX500	50.0
5VX510	51.0
5VX530	53.0
5VX560	56.0
5VX600	60.0
5VX630	63.0
5VX650	65.0
5VX670	67.0
5VX710	71.0
5VX750	75.0
5VX800	80.0
5VX810	81.0
5VX830	83.0

V-BELT #	OUTSIDE LENGTH (IN)
5VX850	85.0
5VX860	86.0
5VX880	88.0
5VX890	89.0
5VX900	90.0
5VX950	95.0
5VX960	96.0
5VX990	99.0
5VX1000	100.0
5VX1030	103.0
5VX1050	105.0
5VX1060	106.0
5VX1080	108.0
5VX1108	110.8

V-BELT #	OUTSIDE LENGTH (IN)
5VX1120	112.0
5VX1150	115.0
5VX1160	116.0
5VX1180	118.0
5VX1220	122.0
5VX1250	125.0
5VX1320	132.0
5VX1400	140.0
5VX1500	150.0
5VX1600	160.0
5VX1700	170.0
5VX1800	180.0
5VX1900	190.0
5VX2000	200.0


**BELTS**



**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**



**AA Series Belts**



V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
AA51	53.0	AA70	72.0	AA90	92.0
AA55	57.0	AA73	75.0	AA92	94.0
AA60	62.0	AA75	77.0	AA96	98.0
AA62	64.0	AA78	80.0	AA105	107.0
AA64	66.0	AA80	82.0	AA112	114.0
AA66	68.0	AA85	87.0	AA120	122.0
AA68	70.0	AA88	90.0	AA128	130.0
				AA148	150.0


**AGRI ALSO SUPPLIES BANDED, COGGED, AND TIMING BELTS  
Contact Your Agri Customer Service Rep for More Information**

BELTS



**GATES® CONVENTIONAL V-BELTS: HI-POWER® II BELTS**

**BB Series Belts**



V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)	V-BELT #	OUTSIDE LENGTH (IN)
BB35	38.0	BB85	88.0	BB130	133.0
BB38	41.0	BB90	93.0	BB136	139.0
BB42	45.0	BB92	95.0	BB140	143.0
BB43	46.0	BB93	96.0	BB144	147.0
BB45	48.0	BB94	97.0	BB155	158.0
BB46	49.0	BB97	100.0	BB158	161.0
BB51	54.0	BB105	108.0	BB168	171.0
BB53	56.0	BB107	110.0	BB169	172.0
BB55	58.0	BB108	111.0	BB173	176.0
BB60	63.0	BB111	114.0	BB180	183.0
BB64	67.0	BB112	115.0	BB190	193.0
BB66	69.0	BB116	119.0	BB195	198.0
BB68	71.0	BB118	121.0	BB210	213.0
BB71	74.0	BB120	123.0	BB226	229.0
BB72	75.0	BB122	125.0	BB228	231.0
BB73	76.0	BB123	126.0	BB230	233.0
BB74	77.0	BB124	127.0	BB240	243.0
BB75	78.0	BB127	130.0	BB277	300.0
BB81	84.0	BB128	131.0	BB300	303.0
BB83	86.0	BB129	132.0		

**BELTS**

**AGRI ALSO SUPPLIES CC SECTION AND DD SECTION DOUBLE-V BELTS**  
 Contact Your Agri Customer Service Rep for More Information

**CAST IRON SHEAVES: FOR 4L, 5L, A SECTION, & B SECTION BELTS**

**Single Groove Bushing Type**



BK Sheaves are accurately machined from gray cast iron, statically balanced, painted, and individually packaged.

PART #	OUTSIDE DIAMETER
BK30H	3.15"
BK32H	3.35"
BK34H	3.55"
BK36H	3.75"
BK40H	3.95"
BK45H	4.25"
BK47H	4.45"
BK50H	4.75"
BK52H	4.95"
BK55H	5.25"
BK57H	5.45"

PART #	OUTSIDE DIAMETER
BK60H	5.75"
BK62H	5.95"
BK65H	6.25"
BK67H	6.45"
BK70H	6.75"
BK72H	6.95"
BK75H	7.25"
BK77H	7.45"
BK80H	7.75"
BK85H	8.25"
BK90H	8.75"

PART #	OUTSIDE DIAMETER
BK95H	9.25"
BK100H	9.75"
BK105H	10.25"
BK110H	10.75"
BK115H	11.25"
BK120H	11.75"
BK130H	12.75"
BK140H	13.75"
BK150H	14.75"
BK160H	15.75"
BK190H	18.75"

**Bushings for Above**

PART #	BORE	KEYSEAT
H 3/8	3/8"	None
H 7/16	7/16"	None
H 1/2	1/2"	1/8" x 1/16"
H 9/16	9/16"	1/8" x 1/16"
H 5/8	5/8"	3/16" x 3/32"
H 11/16	11/16"	3/16" x 3/32"
H 3/4	3/4"	3/16" x 3/32"
H 13/16	13/16"	3/16" x 3/32"
H 7/8	7/8"	3/16" x 3/32"
H 15/16	15/16"	1/4" x 1/8"

PART #	BORE	KEYSEAT
H1	1"	1/4" x 1/8"
H 1-1/16	1-1/16"	1/4" x 1/8"
H 1-1/8	1-1/8"	1/4" x 1/8"
H 1-3/16	1-3/16"	1/4" x 1/8"
H 1-1/4	1-1/4"	1/4" x 1/8"
H 1-5/16	1-5/16"	5/16" x 1/16"*
H 1-3/8	1-3/8"	5/16" x 1/16"*
H 1-7/16	1-7/16"	3/8" x 1/16"*
H 1-1/2	1-1/2"	3/8" x 1/16"*

**\*NOTE: SHALLOW KEYSET. KEY FURNISHED TO FIT A STANDARD DEPTH KEYSET IN SHAFT.**

BELT SHEAVES

## CAST IRON SHEAVES: FOR 4L, 5L, A SECTION, & B SECTION BELTS

### Single Groove Bored-To-Size



#### ORDER PART NUMBER AND SIZE (EX: BK24 X 5/8")

PART #	OUTSIDE DIAMETER	STOCK BORE (INCHES)
BK24	2.40"	1/2, 5/8, 3/4, 7/8
BK25	2.50"	1/2, 5/8, 3/4, 7/8, 1
BK26	2.60"	1/2, 5/8, 3/4, 7/8
BK27	2.70"	1/2, 5/8, 3/4, 7/8, 1
BK28	2.95"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK30	3.15"	1/2, 5/8, 3/4, 7/8, 1
BK32	3.35"	1/2, 5/8, 3/4, 7/8, 1
BK34	3.55"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK36	3.75"	1/2, 5/8, 3/4, 7/8, 1", 1-1/8
BK40	3.95"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK45	4.25"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK47	4.45"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK50	4.75"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK52	4.95"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
BK55	5.25"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8, 1-3/16
BK57	5.45"	5/8, 3/4, 7/8, 15/16, 1, 1-1/8
BK60	5.75"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8, 1-3/16
BK62	5.95"	1/2, 5/8, 3/4, 7/8, 15/16, 1, 1-1/8, 1-3/16
BK65	6.25"	5/8, 3/4, 1, 1-1/8
BK67	6.45"	5/8, 3/4, 1, 1-1/8
BK70	6.75"	5/8, 3/4, 15/16, 1, 1-1/8, 1-3/16, 1-7/16
BK72	6.95"	3/4, 1, 1-1/8, 1-3/8
BK75	7.25"	3/4, 1, 1-1/8, 1-3/8
BK77	7.45"	3/4, 1, 1-1/8, 1-3/8
BK80	7.75"	5/8, 3/4, 7/8, 1, 1-1/8, 1-3/16, 1-1/4, 1-3/8, 1-7/16
BK85	8.25"	3/4, 1, 1-1/8, 1-3/8, 1-7/16
BK90	8.75"	3/4, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-3/8, 1-7/16
BK95	9.25"	3/4, 1, 1-1/8, 1-3/8, 1-7/16
BK100	9.75"	3/4, 7/8, 15/16, 1, 1-1/8, 1-3/16, 1-1/4, 1-3/8, 1-7/16
BK105	10.25"	1, 1-3/8, 1-7/16
BK110	10.75"	3/4, 1, 1-1/8, 1-3/16, 1-3/8, 1-7/16
BK115	11.25"	1, 1-7/16, 1-3/8
BK120	11.75"	3/4, 1, 1-3/16, 1-7/16
BK130	12.75"	3/4, 1, 1-1/8, 1-3/16, 1-1/4, 1-7/16
BK140	13.75"	3/4, 1, 1-3/16, 1-7/16
BK160	15.75"	1, 1-1/8, 1-3/16, 1-1/4, 1-7/16
BK190	18.75"	1, 1-3/16, 1-1/4, 1-7/16

BELT SHEAVES

**CAST IRON SHEAVES: FOR 4L, 5L, A SECTION, & B SECTION BELTS**

**Two Groove Bushing Type**



PART #	OUTSIDE DIAMETER	PART #	OUTSIDE DIAMETER	PART #	OUTSIDE DIAMETER
2BK32H	3.35"	2BK55H	5.25"	2BK90H	8.75"
2BK34H	3.55"	2BK57H	5.45"	2BK100H	9.75"
2BK36H	3.75"	2BK60H	5.75"	2BK110H	10.75"
2BK40H	3.95"	2BK62H	5.95"	2BK120H	11.75"
2BK45H	4.25"	2BK65H	6.25"	2BK130H	12.75"
2BK47H	4.45"	2BK67H	6.45"	2BK140H	13.75"
2BK50H	4.75"	2BK70H	6.75"	2BK160H	15.75"
2BK52H	4.95"	2BK80H	7.75"	2BK190H	18.75"

**BUSHINGS FOR ABOVE**


PART #	BORE	KEYSEAT	PART #	BORE	KEYSEAT
H 3/8	3/8"	None	H 1	1"	1/4" x 1/8"
H 7/16	7/16"	None	H 1-1/16	1 1/16"	1/4" x 1/8"
H 1/2	1/2"	1/8" x 1/16"	H 1-1/8	1 1/8"	1/4" x 1/8"
H 9/16	9/16"	1/8" x 1/16"	H 1-3/16	1 3/16"	1/4" x 1/8"
H 5/8	5/8"	3/16" x 3/32"	H 1-1/4	1 1/4"	1/4" x 1/8"
H 11/16	11/16"	3/16" x 3/32"	H 1-5/16	1 5/16"	5/16" x 1/16"*
H 3/4	3/4"	3/16" x 3/32"	H 1-3/8	1 3/8"	5/16" x 1/16"*
H 13/16	13/16"	3/16" x 3/32"	H 1-7/16	1 7/16"	3/8" x 1/16"*
H 7/8	7/8"	3/16" x 3/32"	H 1-1/2	1 1/2"	3/8" x 1/16"*
H 15/16	15/16"	1/4" x 1/8"			

**\*NOTE: SHALLOW KEYSET. KEY FURNISHED TO FIT A STANDARD DEPTH KEYSET IN SHAFT.**

BELT SHEAVES

## CAST IRON SHEAVES: FOR 4L, 5L, A SECTION, & B SECTION BELTS

### Two Groove Bored-To-Size



PART #	OUTSIDE DIAMETER	STOCK BORE (INCHES)
2BK25	2.50"	1/2, 5/8, 3/4, 7/8
2BK27	2.70"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
2BK28	2.95"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
2BK30	3.15"	1/2, 5/8, 3/4, 7/8, 1, 1-1/8
2BK32	3.35"	5/8, 3/4, 7/8, 1, 1-1/8
2BK34	3.55"	5/8, 3/4, 7/8, 1, 1-1/8
2BK36	3.75"	3/4, 7/8, 1, 1-1/8, 1-3/8
2BK40	3.95"	5/8, 3/4, 7/8, 1, 1-1/8
2BK45	4.25"	1, 1-1/8, 1-3/8
2BK47	4.45"	7/8, 1, 1-1/8
2BK50	4.75"	3/4, 1, 1-1/8, 1-3/8
2BK52	4.95"	5/8, 7/8, 1, 1-1/8, 1-3/8
2BK55	5.25"	1-1/8, 1-3/8
2BK57	5.45"	1, 1-1/8, 1-3/8
2BK60	5.75"	3/4, 7/8, 1, 1-1/8, 1-3/8
2BK62	5.95"	1, 1-1/8, 1-3/8
2BK65	6.25"	1, 1-1/8, 1-3/8
2BK67	6.45"	1, 1-1/8, 1-3/8
2BK70	6.75"	3/4, 1, 1-1/8, 1-3/16, 1-3/8, 1-7/16
2BK80	7.75"	3/4, 1, 1-1/8, 1-3/16, 1-3/8, 1-7/16
2BK90	8.75"	3/4, 1, 1-1/8, 1-3/16, 1-3/8, 1-7/16
2BK100	9.75"	3/4, 1, 1-3/16, 1-3/8, 1-7/16
2BK110	10.75"	3/4, 1, 1-3/16, 1-3/8, 1-7/16
2BK120	11.75"	1, 1-3/16, 1-7/16
2BK130	12.75"	1, 1-3/16, 1-7/16
2BK140	13.75"	1, 1-3/16, 1-7/16
2BK160	15.75"	1, 1-3/16, 1-7/16
2BK190	18.75"	1-3/16, 1-7/16

BELT SHEAVES

**PIONEER TIPS & ADAPTERS: MADE IN THE USA**



**Part #5060-4**

**John Deere® Old Style Male Tip**

PIONEER #	SAFEWAY #	J.D. PART #	DESCRIPTION	THREAD
5060-4	S11-4	RE-11447	Male tip, ball check	1/2" pipe
5060-15	S11-15	AR93819	Male tip, ball check	3/4" - 16 ORB



**Part #5070-4**

**International Harvester Male Tip**

PIONEER #	SAFEWAY #	IHC PART #	DESCRIPTION	THREAD
5070-4	S12-4	1272770	Male tip, ball check	1/2" pipe
5070-16	S12-16	544787R91	Male tip, ball check	7/8" - 14 ORB



**Part #5070-16**

**J I Case Old Style Male Tip**

PIONEER #	SAFEWAY #	J.D. PART #	DESCRIPTION	THREAD
5080-4	S13-4	A160884	Male tip, ball check	1/2" pipe



**Part #5080-4**

**ISO Standard Replacement Tips**

PIONEER #	SAFEWAY #	DESCRIPTION	THREAD
8010-4	S71-4	ISO male tip, ball check	1/2" pipe
8010-4P	S71-4P	ISO male Tip, poppet check	1/2" pipe
8010-15	S71-15	ISO male tip, ball check	3/4" - 16 ORB
8010-15P	S71-15P	ISO male Tip, poppet check	3/4" - 16 ORB
8010-16	S71-16	ISO male tip, ball check	7/8" - 14 ORB
8010-16P	S71-16P	ISO male Tip, poppet check	7/8" - 14 ORB



**Part #8010-4**

**Complete Couplers:  
Old Style International Harvester Interchange**

PIONEER #	SAFEWAY #	SLEEVE TYPE	THREAD
4000-4	S20-4	Single	1/2" pipe
4200-4	S40-4	Double	1/2" pipe



**Part #8010-4P**

PIONEER TIPS & ADAPTERS



## PIONEER TIPS & ADAPTERS: MADE IN THE USA



**Part #4067-4**



**Part #4075-4**



**Part #4068-4**

PIONEER #	SAFEWAY #	DESCRIPTION
4060-4	S25-4-1	ISO male tip to John Deere® female body
4070-4	S25-4-2	ISO male tip to Int'l Harvester female body
4065-4	S25-4-3	John Deere® male tip to Pioneer female body
4065-4L	S25-4-3D	John Deere® cone style tip to new style Deere® and Ford body
4067-4	S25-4-4	John Deere® cone style tip to Int'l Harvester female body
4076-4	S25-4-5	Int'l Harvester male tip to John Deere® cone style body
4080-4	S25-4-6	ISO male tip to old style Case® female body
4075-4	S25-4-7	Int'l Harvester male tip to Pioneer ISO female body
4075-4L	S25-4-7D	Int'l Harvester male tip to new style John Deere® and Ford body
4085-4	S25-4-8	Old style Case® male tip to Pioneer ISO female body
4068-4	S25-4-9	John Deere® cone style tip to old style Case® female body
4086-4	S25-4-10	Old style Case® male tip to John Deere® cone style body
	S25-4-11	Int'l Harvester male tip to Ford or Pioneer ISO body

## Body Halves

PART #	DESCRIPTION
4050-4	Same as Safeway #S25-4 1/2" - 14 NPTF one way sleeve
4050-16	Same as Safeway #S25-16 7/8-14" 1/2" - 14 NPTF one way sleeve
4250-4	Same as Safeway #S45-4 1/2" - 14 NPTF double acting sleeve
S25-4-20	Female body 1/2" NPT. Interchanges with JD #AR47331, use with #5060-4 tip.
S25-15-20	Female body 3/4" - 16 ORB. Interchanges with JD #AR47331, use with #5060-15 tip.
S25-4-21P	Female body 1/2" NPT. Interchanges with IH #544788R1, use with #5070-4 tip.
S25-16-21P	Female body 7/8" - 14 ORB. Interchanges with IH #544788R1, use with #5070-16 tip.

PIONEER TIPS &  
ADAPTERS

## Breakaway Clamps, Dust Caps, & Plugs

PART #	DESCRIPTION
5006-4	Double breakaway clamp for all couplings that have a 1-1/2" diameter sleeve
S42-4-20	Replaces double breakaway clamp for #S25-4-20 and #S25-15-20 John Deere® style bodies
S42-4-21	Double breakaway clamp for #S25-4-21P and #S25-16-21P International Harvester style bodies
5205-4	Dust plug for 1/2" body
5209-4	Dust cap for 1/2" body



**IRRIGATION DRIVE SHAFTS**

**36" Standard Length Drive Shaft**



PART #	DESCRIPTION
N-141-36	Series 41 drive shaft, 36" length
N-148-36	Series 48 drive shaft, 36" length

**REPLACEMENT PARTS**

**Replacement Parts for 1410 Series for Part #N-141-36: Drive Shaft 36"**

PART #	DESCRIPTION
2-0054	Cross kit
N3-3-508KK	Slip yoke
N3-40-1491	Stub shaft
N3-28-557	Weld yoke
N3-2-159	Flange yoke

**Replacement Parts for 1480 Series for Part #N-148-36: Drive Shaft 48"**

PART #	DESCRIPTION
3-0188	Cross kit
N3-3-1601KK	Slip yoke
N3-53-451-1	Stub shaft
N3-26-537	Weld yoke
N3-2-479	Flange yoke

**SOLID SHAFT COLLARS: ZINC PLATED, SCREW SET TYPE**


PART # & BORE SIZE	OUTSIDE DIAMETER	WIDTH	SET SCREW TYPE
SC-1/8"	3/8"	1/4"	6-40
SC-3/16"	7/16"	1/4"	8-32
SC-1/4"	1/2"	5/16"	10-32
SC-5/16"	5/8"	5/16"	10-32
SC-3/8"	3/4"	3/8"	1/4-20
SC-7/16"	7/8"	7/16"	1/4-20
SC-1/2"	1"	7/16"	1/4-20
SC-9/16"	1"	7/16"	1/4-20
SC-5/8"	1-1/16"	1/2"	5/16-8
SC-11/16"	1-1/4"	9/16"	5/16-8
SC-3/4"	1-1/4"	9/16"	5/16-8
SC-13/16"	1-5/16"	9/16"	5/16-8
SC-7/8"	1-1/2"	9/16"	5/16-8
SC-15/16"	1-1/2"	9/16"	5/16-8
SC-1"	1-5/8"	5/8"	5/16-8
SC-1 1/16"	1-3/4"	5/8"	5/16-8
SC-1 1/8"	1-3/4"	5/8"	5/16-8
SC-1 3/16"	2"	11/16"	3/8-16
SC-1 1/4"	2"	11/16"	3/8-16

**SOLID SHAFT COLLARS**

**WE ALSO OFFER SPLIT SHAFT COLLARS & STAINLESS STEEL SET COLLARS**  
*Ask your Agri sales representative for more information.*


**SOLID SHAFT COLLARS: ZINC PLATED, SCREW SET TYPE**

PART # & BORE SIZE	OUTSIDE DIAMETER	WIDTH	SET SCREW TYPE
SC-1 5/16"	2-1/8"	11/16"	3/8-16
SC-1 3/8"	2-1/8"	3/4"	3/8-16
SC-1 7/16"	2-1/4"	3/4"	3/8-16
SC-1 1/2"	2-1/4"	3/4"	3/8-16
SC-1 9/16"	2-1/2"	13/16"	3/8-16
SC-1 5/8"	2-1/2"	13/16"	3/8-16
SC-1 11/16"	2-1/2"	13/16"	3/8-16
SC-1 3/4"	2-3/4"	7/8"	1/2-13
SC-1 13/16"	2-3/4"	7/8"	1/2-13
SC-1 7/8"	2-3/4"	7/8"	1/2-13
SC-1 15/16"	3"	7/8"	1/2-13
SC-2"	3"	7/8"	1/2-13
SC-2 1/16"	3"	7/8"	1/2-13
SC-2 1/8"	3"	7/8"	1/2-13
SC-2 3/16"	3-1/4"	15/16"	1/2-13
SC-2 1/4"	3-1/4"	15/16"	1/2-13
SC-2 5/16"	3-1/4"	15/16"	1/2-13
SC-2 3/8"	3-1/4"	15/16"	1/2-13
SC-2 7/16"	3-1/2"	1"	1/2-13
SC-2 1/2"	3-1/2"	1"	1/2-13
SC-2 9/16"	3-3/4"	1"	1/2-13
SC-2 5/8"	4"	1-1/8"	1/2-13
SC-2 11/16"	4"	1-1/8"	1/2-13
SC-2 3/4"	4"	1-1/8"	1/2-13
SC-2 7/8"	4-1/4"	1-1/8"	1/2-13
SC-2 15/16"	4-1/4"	1-1/8"	1/2-13
SC-3"	4-1/4"	1-1/8"	1/2-13

SOLID SHAFT COLLARS

**JAW COUPLINGS**

- Temperature and oil resistant
- Simple structure and easy to install
- Maintenance free



PART #	DIMENSIONS				MAX RPMS	BORE
	A	B	C	D		
L050	1-5/64"	1-23/32"	15/32"	5/8"	18000	1/4"-5/8"
L070	1-23/64"	2"	1/2"	3/4"	14000	1/4"-3/4"
L075	1-3/4"	2-1/8"	1/2"	13/16"	11000	1/4"-7/8"
L090	2-7/64"	2-1/8"	1/2"	13/16"	9000	1/4"-1"
L095	2-7/64"	2-1/2"	1/2"	1"	9000	7/16"-1-1/8"
L099	2-17/32"	2-7/8"	3/4"	1-1/16"	7000	7/16"-1-3/16"
L100	2-17/32"	3-1/2"	3/4"	1-3/8"	7000	7/16"-1-3/8"

**SPIDERS**



PART #
L050 Spider
L070 Spider
L075 Spider
L090 Spider
L095 Spider
L099 Spider
L100 Spider



SOLID SHAFT COLLARS

**A COMPLETE JAW COUPLING CONSISTS OF TWO (2) JAW HALVES WITH BORE SIZE AND SPIDER**